

DSC 140B

Representation Learning

Lecture 19 | Part 1



Neural Networks

Beyond RBFs


- ▶ When training RBFs, we fixed the basis functions *before* training the weights.
- ▶ Representation learning was decoupled from learning the prediction function.
- ▶ **Now:** learn representation **and** prediction function together.

Linear Models


$$H(\vec{X}) = w_0 + w_1 X_1 + \dots + w_d X_d$$

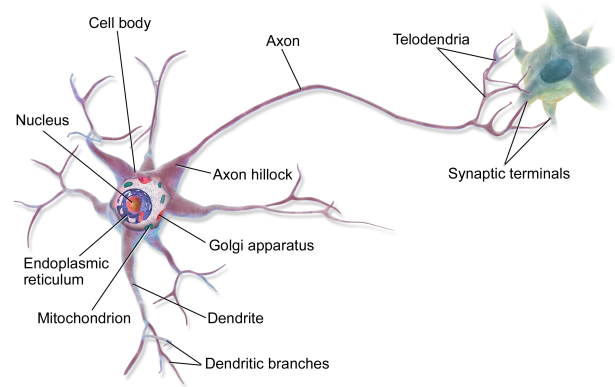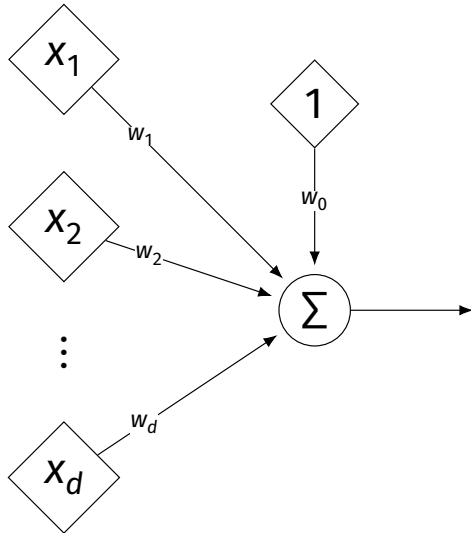

Generalizing Linear Models

- ▶ The brain is a **network** of neurons.
 - ▶ The output of a neuron is used as an input to another.
 - ▶ **Idea:** chain together multiple “neurons” into a **neural network**.
- 

Neural Network¹ (One Hidden Layer)

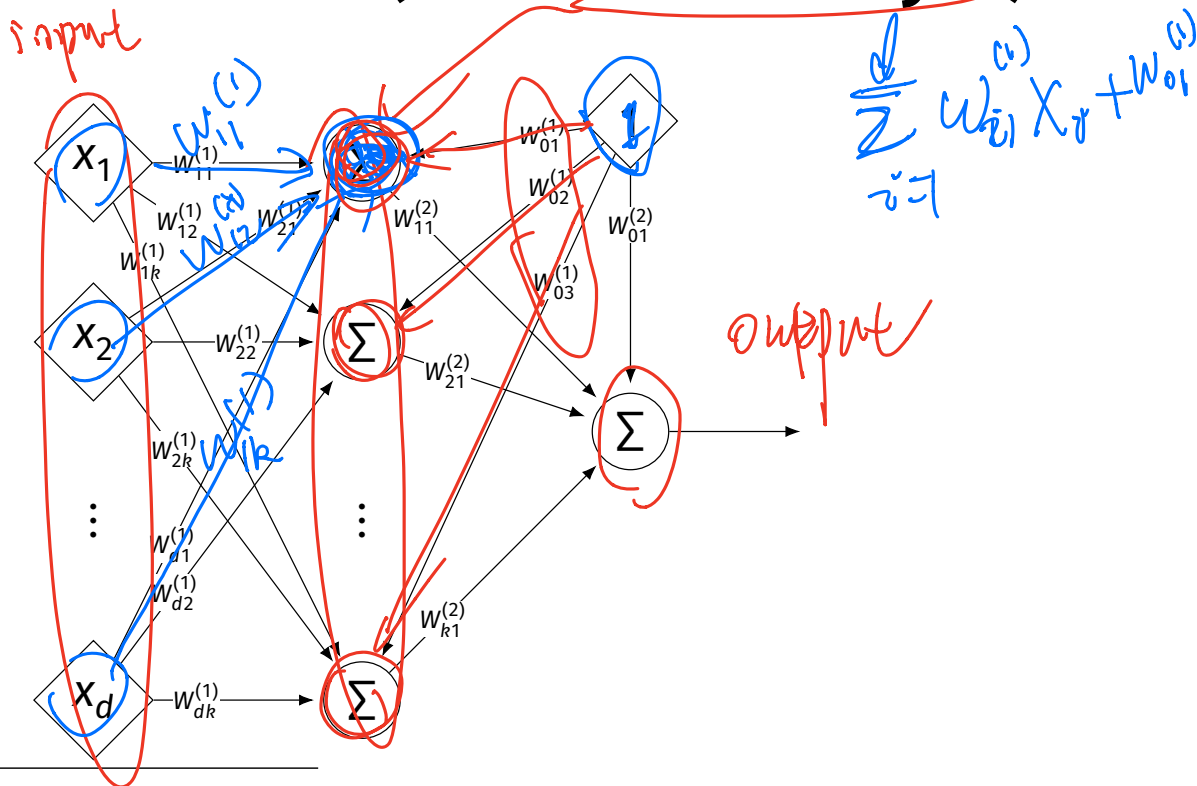

¹Specifically, a fully-connected, feed-forward neural network


Architecture

- ▶ Neurons are organized into **layers**.
 - ▶ **Input layer**, **output layer**, and **hidden layers**.
- ▶ Number of cells in input layer determined by dimensionality of input feature vectors.
- ▶ Number of cells in hidden layer(s) is determined by you.
- ▶ Output layer can have >1 neuron.

Architecture

- ▶ Can have more than one hidden layer.
 - ▶ A network is “**deep**” if it has >1 hidden layer.
- ▶ Hidden layers can have different number of neurons.

Neural Network (Two Hidden Layers)

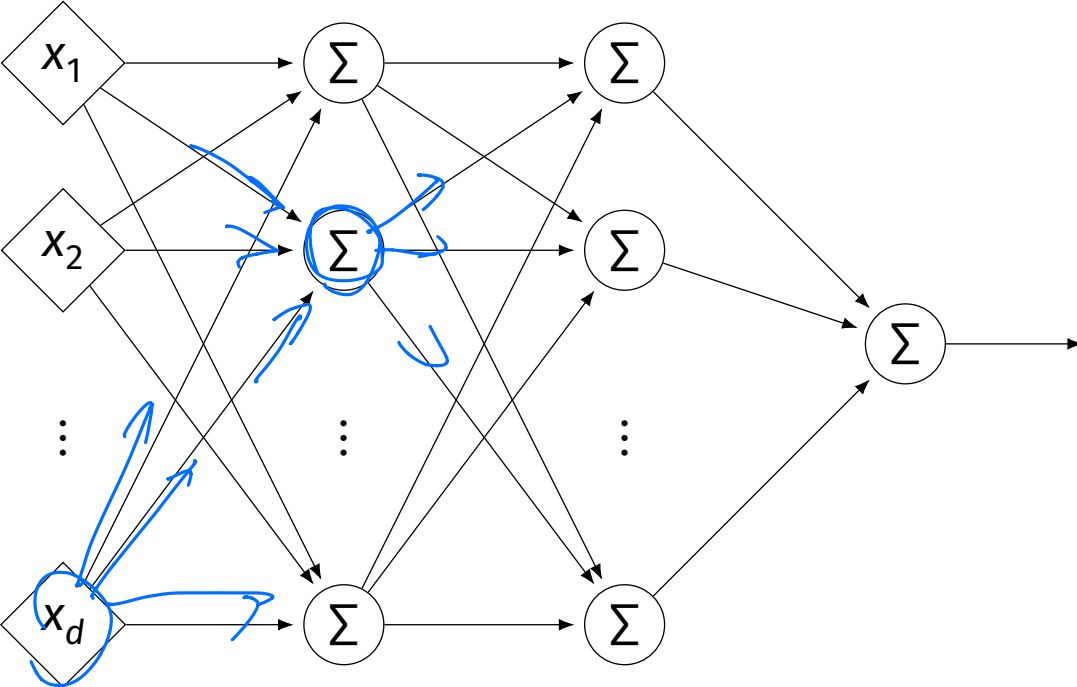


Network Weights

- ▶ A neural network is a type of function.
- ▶ Like a linear model, a NN is **totally determined** by its weights.
- ▶ But there are often many more weights to learn!


Notation

- ▶ Input is layer #0.
- ▶ $W_{jk}^{(i)}$ denotes weight of connection between neuron j in layer $(i - 1)$ and neuron k in layer i
- ▶ Layer weights are 2-d arrays.

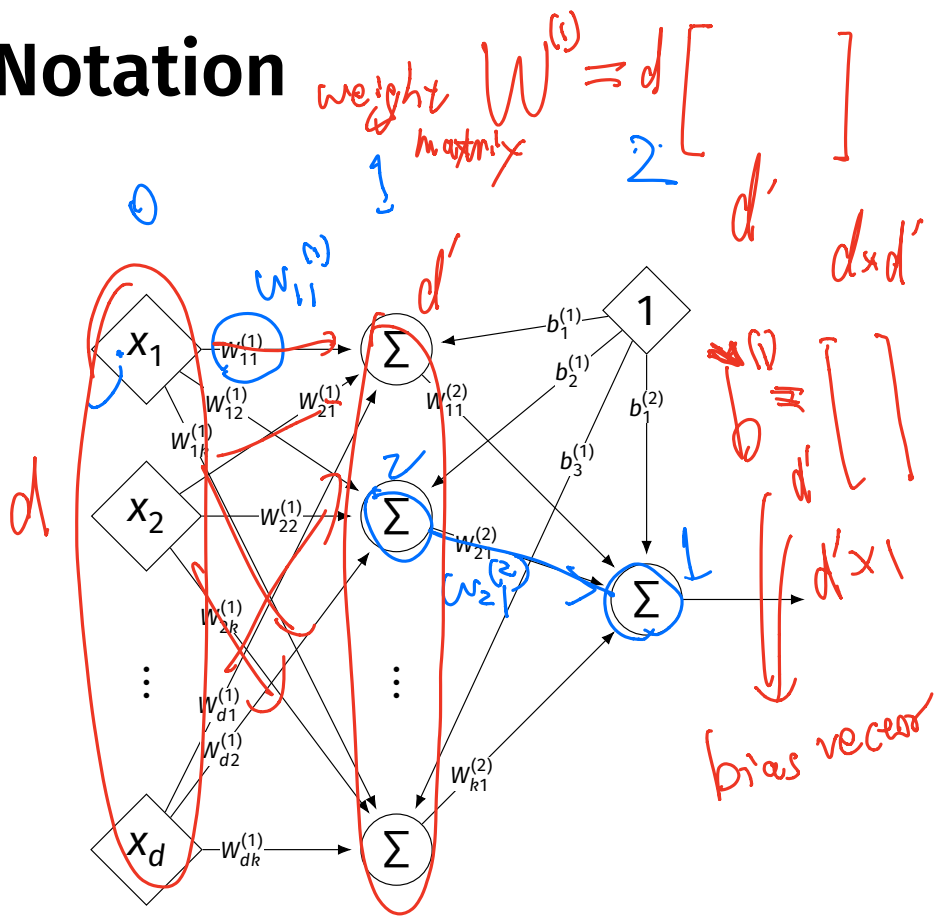


Notation

- ▶ Each hidden/output neuron gets a “dummy” input of 1.
- ▶ j th node in i th layer assigned a bias weight of $b_j^{(i)}$
- ▶ Biases for layer are a vector: $\vec{b}^{(i)}$

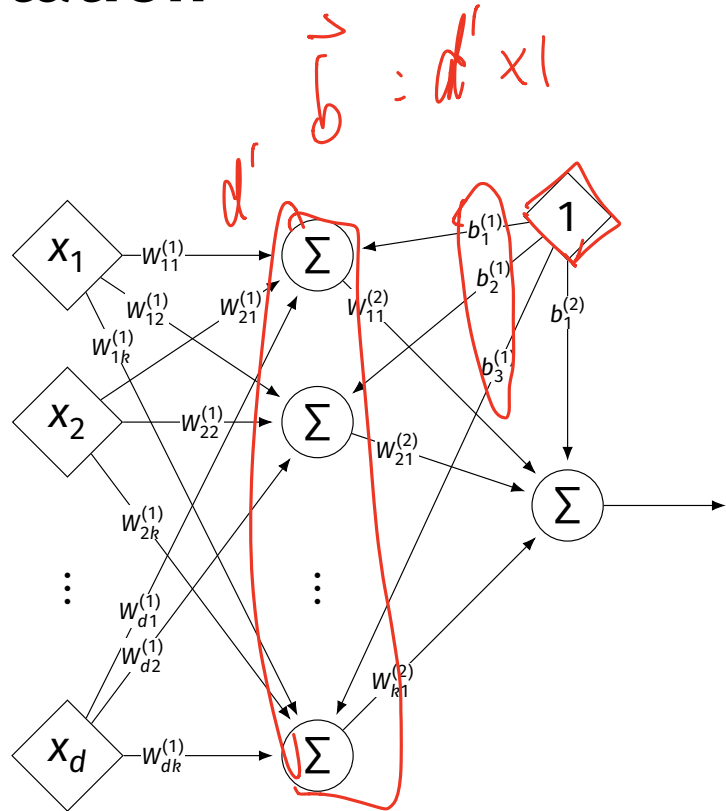


Notation

- ▶ Typically, we will not draw the weights.
- ▶ We will not draw the dummy input, too, but it is there.

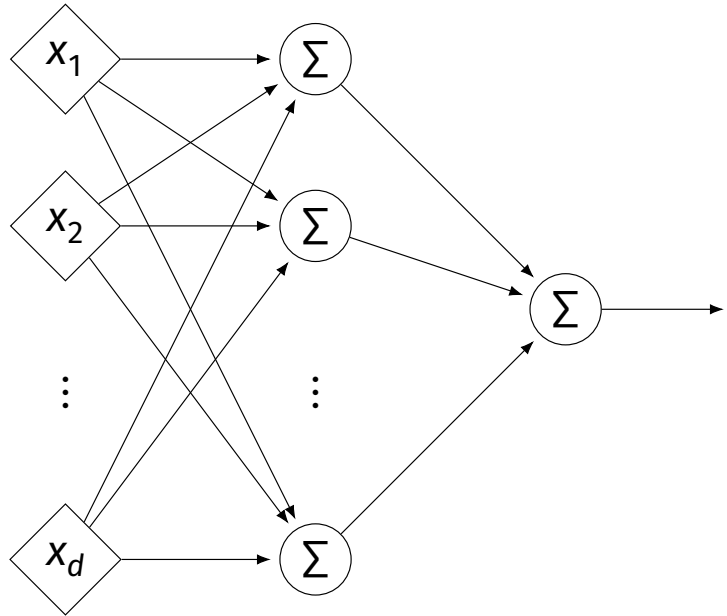

Example

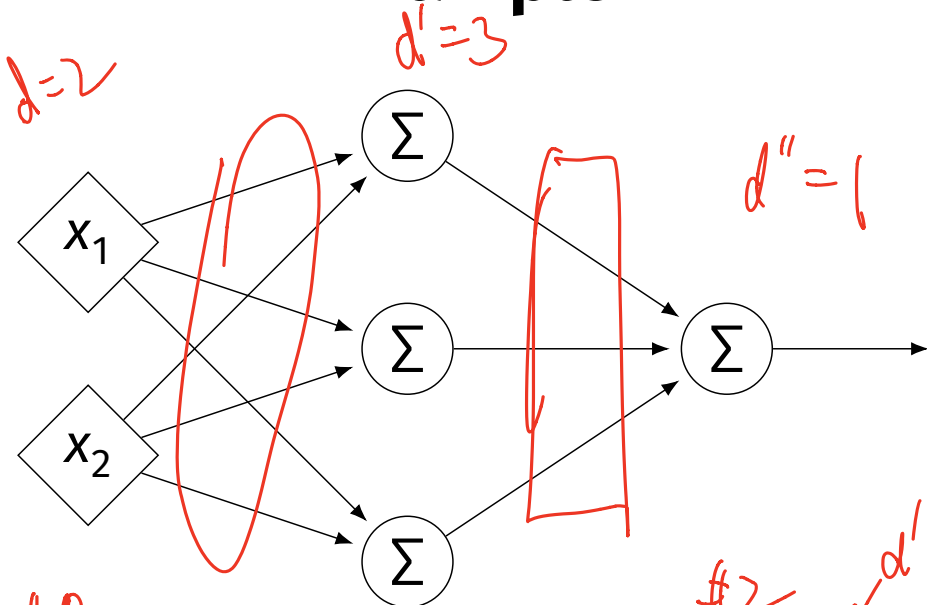

#0

$$W^{(1)} = \begin{pmatrix} 2 & -1 & 0 \\ 4 & 5 & 2 \end{pmatrix}$$

2x3

$$\vec{b}^{(1)} = (3, -2, -2)^T$$

3x1

#1

$$W^{(2)} = \begin{pmatrix} 3 \\ 2 \\ -4 \end{pmatrix}$$


$$\vec{b}^{(2)} = (-4)^T$$

#2

d'
3x1

d''
1x1

Example

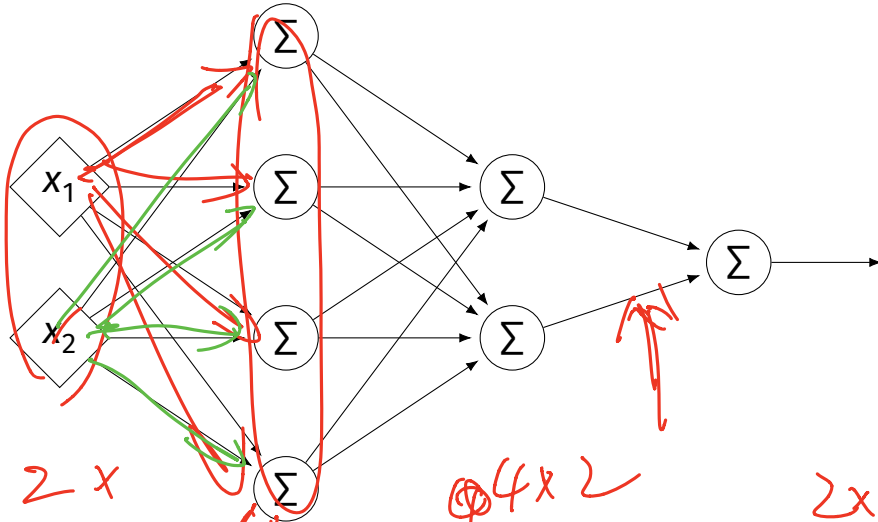

$W^{(1)} = \begin{pmatrix} 2 & -1 & -3 & 0 \\ 4 & 5 & -7 & 2 \end{pmatrix}$

$W^{(2)} = \begin{pmatrix} 1 & 2 \\ -4 & 3 \\ -6 & -2 \\ 3 & 4 \end{pmatrix}$

$W^{(3)} = \begin{pmatrix} -1 & 5 \end{pmatrix}^T$

$\vec{b}^{(1)} = (3, 6, -2, -2)^T$


$\vec{b}^{(2)} = (-4, 0)^T$

$\vec{b}^{(3)} = (1)^T$

Evaluation

- ▶ These are “fully-connected, feed-forward” networks with one output. *dense layer*
- ▶ They are functions $H(\vec{x}) : \mathbb{R}^d \rightarrow \mathbb{R}^1$
- ▶ To evaluate $H(\vec{x})$, compute result of layer i , use as inputs for layer $i + 1$.

Example

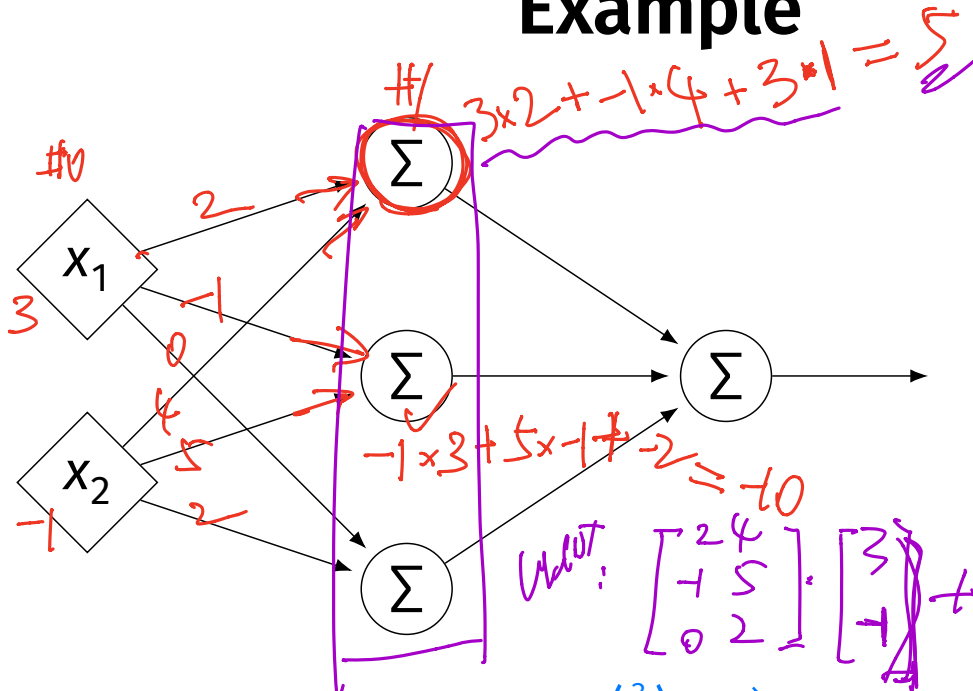

$W^{(1)} \cdot X = Z$
 $3 \times 2 \quad 2 \times 1 \quad 3 \times 1$
 $\vec{x} = (3, -1)^T$
 $z_1^{(1)} = 5$

$z_2^{(1)} = -10$

$z_3^{(1)} =$

Weight: $\begin{bmatrix} 2 & 4 \\ -1 & 5 \\ 0 & 2 \end{bmatrix} \cdot \begin{bmatrix} 3 \\ -1 \end{bmatrix} + \begin{bmatrix} 3 \\ -2 \\ -2 \end{bmatrix} = \begin{bmatrix} 5 \\ -10 \\ -4 \end{bmatrix}$
 $z_1^{(2)} =$

$W^{(1)} = \begin{pmatrix} 2 & -1 & 0 \\ 4 & 5 & 2 \\ -1 & 2 & 3 \end{pmatrix}$

$W^{(2)} = \begin{pmatrix} 3 \\ 2 \\ -4 \end{pmatrix}$


$\vec{b}^{(1)} = (3, -2, -2)^T$

$\vec{b}^{(2)} = (-4)^T$

Evaluation as Matrix Multiplication

- ▶ Let $z_j^{(i)}$ be the output of node j in layer i .
- ▶ Make a vector of these outputs: $\vec{z}^{(i)} = (z_1^{(i)}, z_2^{(i)}, \dots)^T$
- ▶ Observe that $\vec{z}^{(i)} = [W^{(i)}]^T \vec{z}^{(i-1)} + \vec{b}^{(i)}$

Example

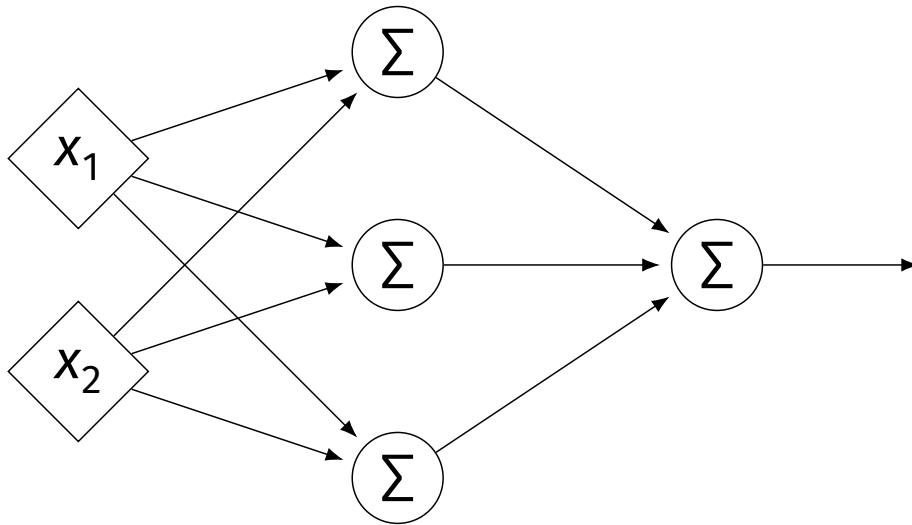

▶ $\vec{x} = (3, -1)^T$

▶ $z_1^{(1)} =$

▶ $z_2^{(1)} =$

▶ $z_3^{(1)} =$

▶ $z_1^{(2)} =$


$$W^{(1)} = \begin{pmatrix} 2 & -1 & 0 \\ 4 & 5 & 2 \end{pmatrix} \quad W^{(2)} = \begin{pmatrix} 3 \\ 2 \\ -4 \end{pmatrix} \quad \vec{b}^{(1)} = (3, -2, -2)^T \quad \vec{b}^{(2)} = (-4)^T$$

Each Layer is a Function

- ▶ We can think of each layer as a function mapping a vector to a vector.


- ▶ $H^{(1)}(\vec{z}) = \underbrace{[W^{(1)}]^T}_{\mathbb{R}^d} \vec{z} + \underbrace{\vec{b}^{(1)}}_{\mathbb{R}^3}$
 - ▶ $H^{(1)} : \mathbb{R}^2 \rightarrow \mathbb{R}^3$

- ▶ $H^{(2)}(\vec{z}) = [W^{(2)}]^T \vec{z} + \vec{b}^{(2)}$
 - ▶ $H^{(2)} : \mathbb{R}^3 \rightarrow \mathbb{R}^1$

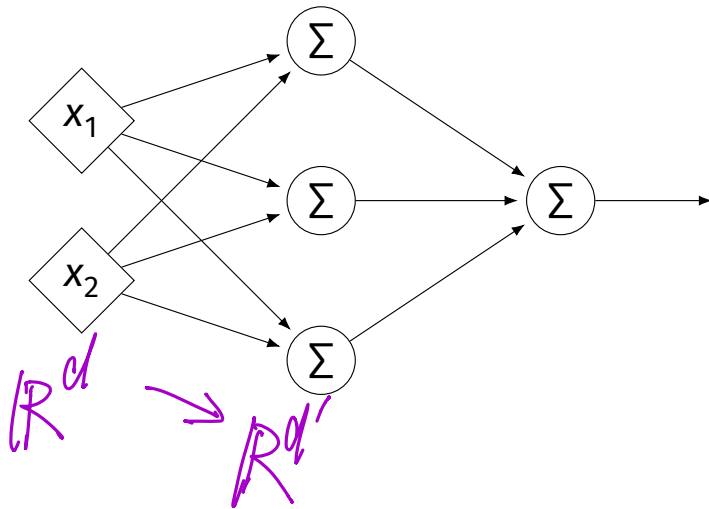

NNs as Function Composition

- ▶ The full NN is a composition of layer functions.

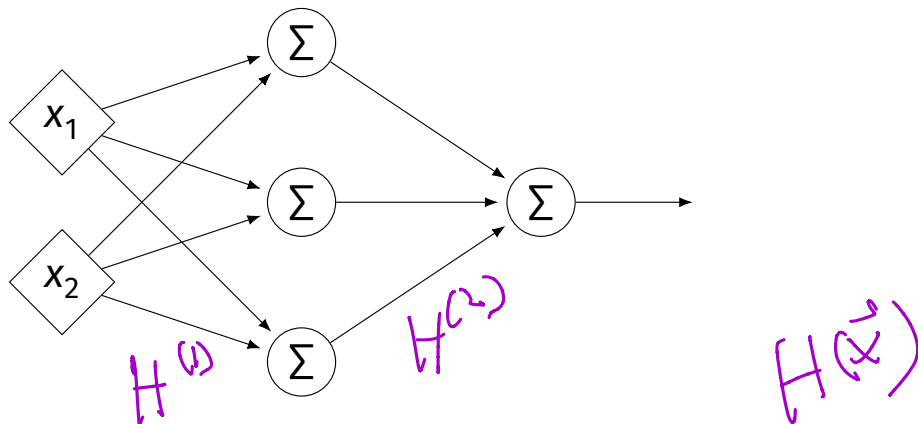

$$H(\vec{x}) = H^{(2)}(\underbrace{H^{(1)}(\vec{x})}_{\vec{z}^{(1)}}) = [W^{(2)}]^T \left(\underbrace{[W^{(1)}]^T \vec{x} + \vec{b}^{(1)}}_{\vec{z}^{(1)}} \right) + \vec{b}^{(2)}$$

NNs as Function Composition

- ▶ In general, if there k hidden layers:

$$H(\vec{X}) = H^{(k+1)} \left(\dots H^{(3)} \left(H^{(2)} \left(H^{(1)}(\vec{X}) \right) \right) \dots \right)$$

$\left[\begin{array}{c} \uparrow \\ \downarrow \end{array} \right]$

Exercise

Show that:


$$H(\vec{x}) = [W^{(2)}]^T \left([W^{(1)}]^T \vec{x} + \vec{b}^{(1)} \right) + \vec{b}^{(2)} = \vec{w} \cdot \text{Aug}(\vec{x})$$

for some appropriately-defined vector \vec{w} .

$$\underbrace{W^{(2)T} W^{(1)T}}_{\vec{w}} \vec{x} + \underbrace{W^{(2)T} \vec{b}^{(1)} + \vec{b}^{(2)}}_{\vec{b}} = \vec{w} \cdot \text{Aug}(\vec{x})$$

Result

- ▶ The composition of linear functions is again a linear function.
- ▶ The NNs we have seen so far are all equivalent to linear models!
- ▶ For NNs to be more useful, we will need to add non-linearity.

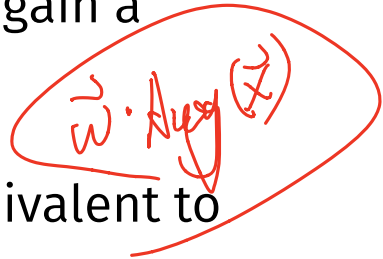

A handwritten red equation $\vec{w} \cdot A(x)$ is circled in red. The vector \vec{w} has a double arrow above it, and $A(x)$ has a double arrow pointing down to it.


Activations

- ▶ So far, the output of a neuron has been a linear function of its inputs:

$$W_0 + W_1 X_1 + W_2 X_2 + \dots$$

- ▶ Can be arbitrarily large or small.

- ▶ But real neurons are **activated** non-linearly.
 - ▶ E.g., saturation.

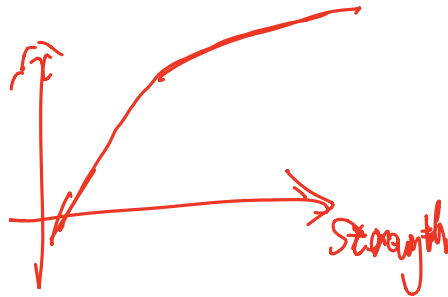

Idea


- ▶ To add nonlinearity, we will apply a non-linear activation function g to the output of **each** hidden neuron (and sometimes the output neuron).

Linear Activation

- ▶ The **linear** activation is what we've been using.

$$\sigma(z) = z$$

$$z = w_0 + w_1 x_1 + w_2 x_2 + \dots$$

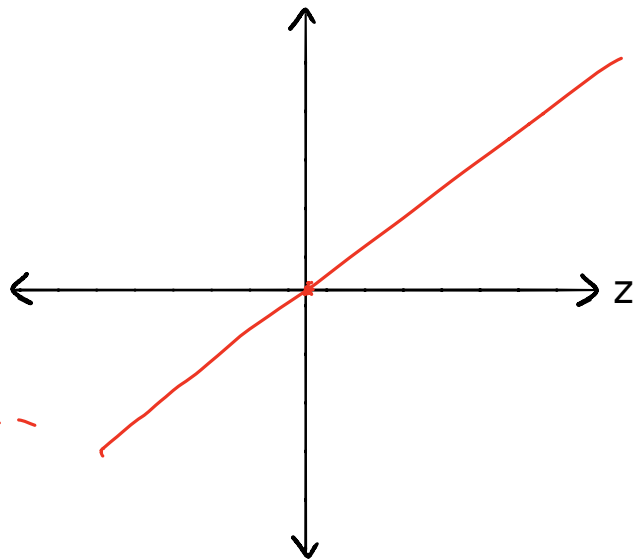


Sigmoid Activation

- ▶ The **sigmoid** models saturation in many natural processes.

$$\sigma(z) = \frac{1}{1 + e^{-z}} \quad 0 < 1$$

$$\sigma(0) = \frac{1}{1+1} = \frac{1}{2}$$

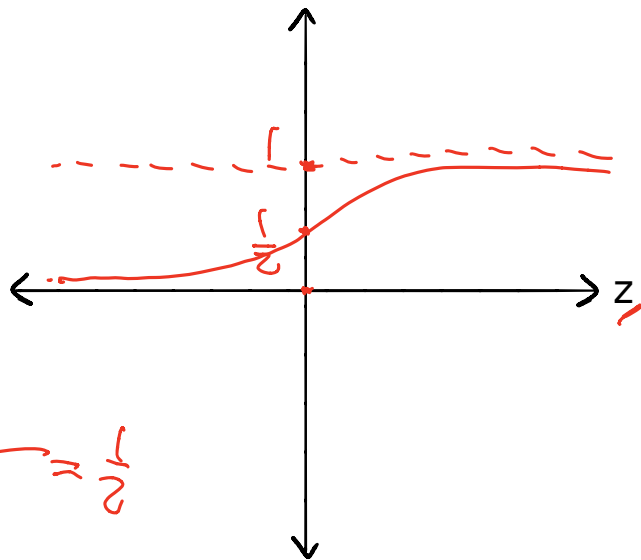


ReLU Activation


- ▶ The Rectified Linear Unit (ReLU) tends to work better in practice.

$$g(z) = \max\{0, z\}$$

$$z = w_0 + w_1 x_1 + w_2 x_2 + \dots$$

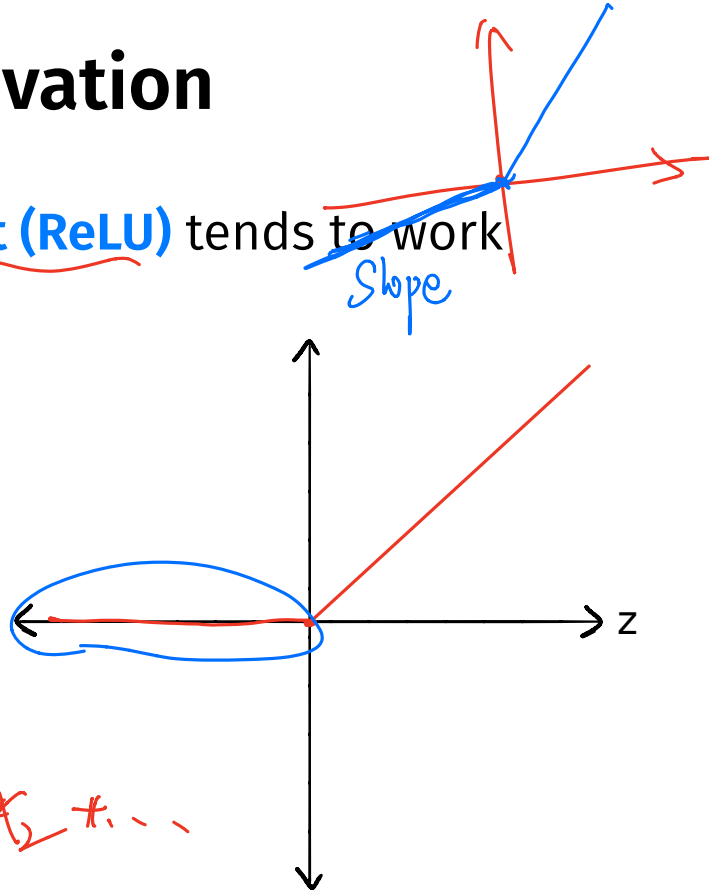


Notation

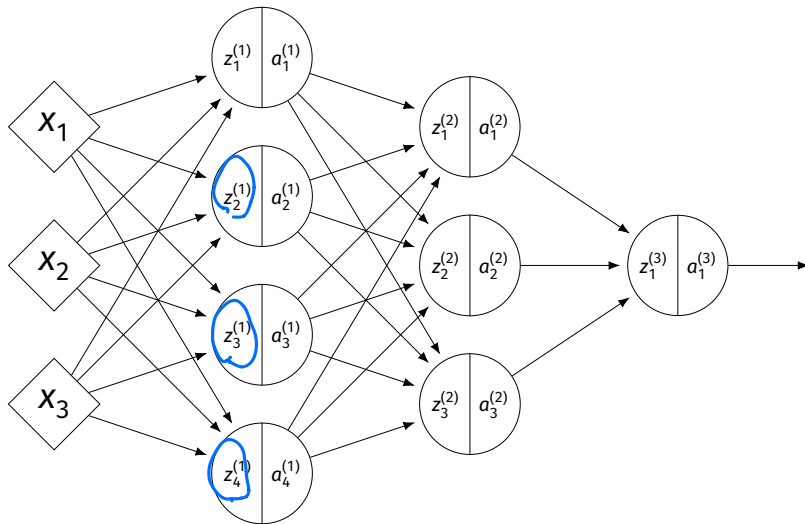

- ▶ $z_j^{(i)}$ is the linear activation before g is applied.
- ▶ $a_j^{(i)}$ = $g(z_j^{(i)})$ is the actual output of the neuron.


Example

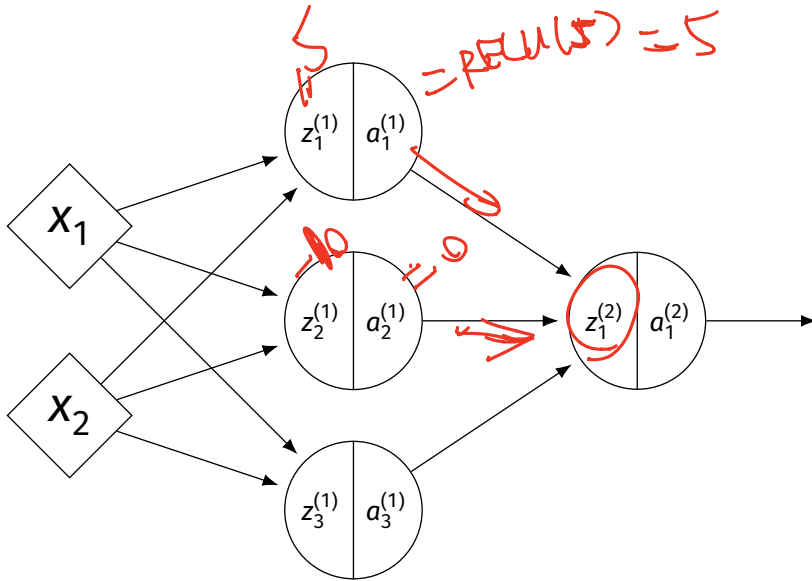

- ▶ $g = \text{ReLU}$
- ▶ Linear output
- ▶ $\vec{x} = (3, -1)^T$
- ▶ $z_1^{(1)} =$
- ▶ $a_1^{(1)} =$
- ▶ $z_2^{(1)} =$
- ▶ $a_2^{(1)} =$
- ▶ $z_3^{(1)} =$
- ▶ $a_3^{(1)} =$
- ▶ $z_1^{(2)} =$

$$W^{(1)} = \begin{pmatrix} 2 & -1 & 0 \\ 4 & 5 & 2 \end{pmatrix} \quad W^{(2)} = \begin{pmatrix} 3 \\ 2 \\ -4 \end{pmatrix} \quad \vec{b}^{(1)} = (3, -2, -2)^T \quad \vec{b}^{(2)} = (-4)^T$$

Output Activations

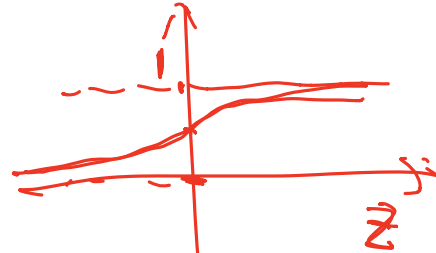

- ▶ The activation of the output neuron(s) can be different than the activation of the hidden neurons.
- ▶ In classification, **sigmoid** activation makes sense. $[0, 1]$
- ▶ In regression, **linear** activation makes sense. $0-1$

Main Idea

A neural network with linear activations is a linear model. If non-linear activations are used, the model is made non-linear.

DSC 140B

Representation Learning

Lecture 19 | Part 2

Demo

Feature Map

- ▶ We have seen how to fit non-linear patterns with linear models via **basis functions** (i.e., a feature map).

$$H(\vec{x}) = w_0 + w_1 \phi_1(\vec{x}) + \dots + w_k \phi_k(\vec{x})$$

- ▶ These basis functions are fixed **before** learning.
- ▶ **Downside:** we have to choose ϕ somehow.

Learning a Feature Map

- ▶ **Interpretation:** The hidden layers of a neural network **learn** a feature map.

Each Layer is a Function


- ▶ We can think of each layer as a function mapping a vector to a vector.

- ▶ $H^{(1)}(\vec{z}) = [W^{(1)}]^T \vec{z} + \vec{b}^{(1)}$

- ▶ $H^{(1)} : \mathbb{R}^2 \rightarrow \mathbb{R}^3$


- ▶ $H^{(2)}(\vec{z}) = [W^{(2)}]^T \vec{z} + \vec{b}^{(2)}$

- ▶ $H^{(2)} : \mathbb{R}^3 \rightarrow \mathbb{R}^1$

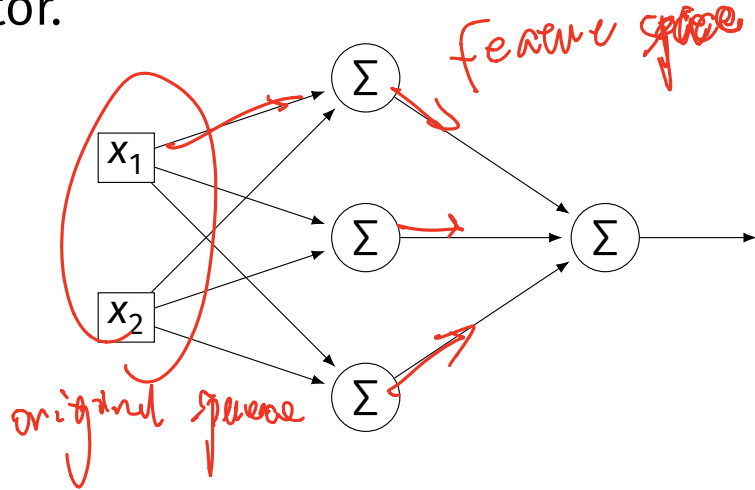


Each Layer is a Function

- ▶ The hidden layer performs a feature map from \mathbb{R}^2 to \mathbb{R}^3 .
- ▶ The output layer makes a prediction in \mathbb{R}^3 .
- ▶ **Intuition:** The feature map is learned so as to make the output layer's job “easier”.

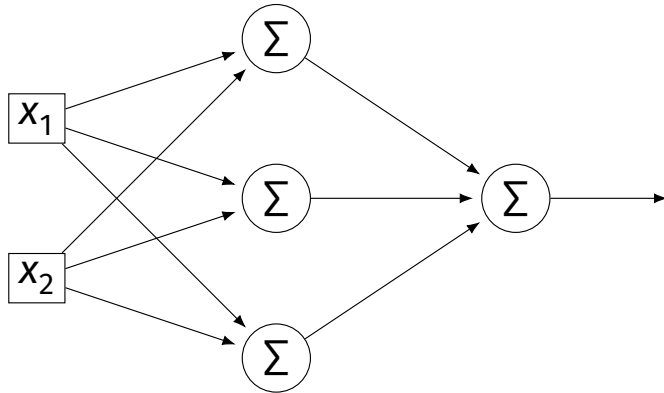


Demo

- ▶ Train a deep network to classify the data below.
- ▶ Hidden layers will learn a new feature map that makes the data linearly separable.

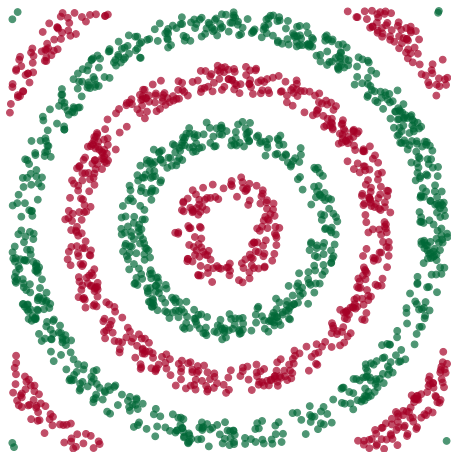


Demo


- ▶ We'll use three hidden layers, with last having two neurons.
- ▶ We can see this new representation!
- ▶ Plug in \vec{x} and see activations of last hidden layer.

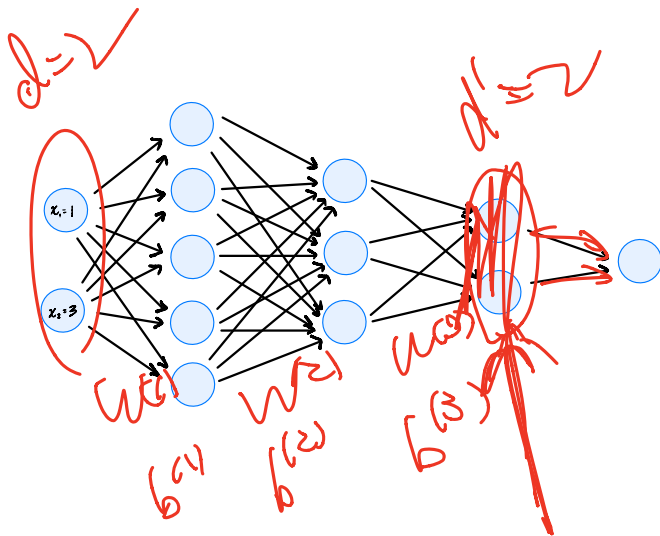



Learning a New Representation

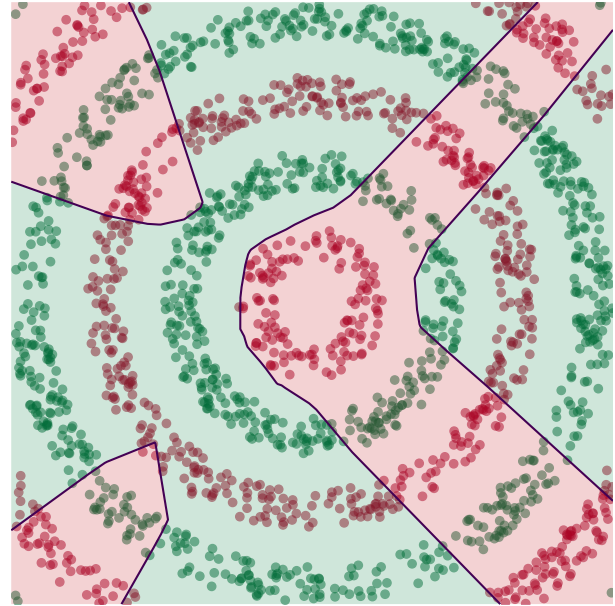



Learning a New Representation

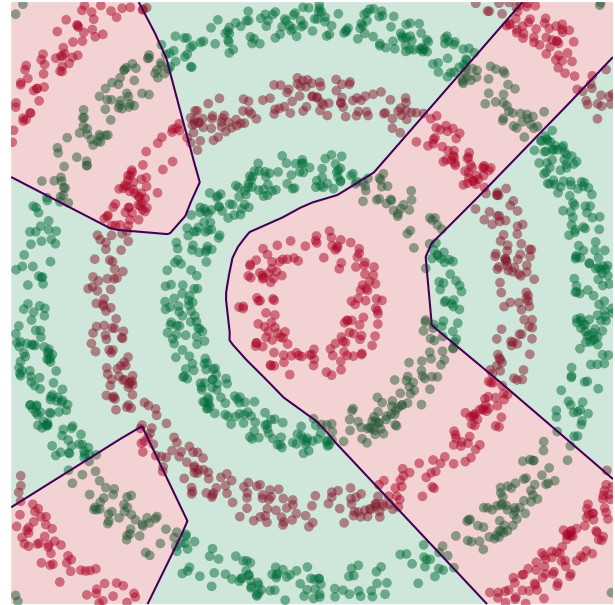



Learning a New Representation

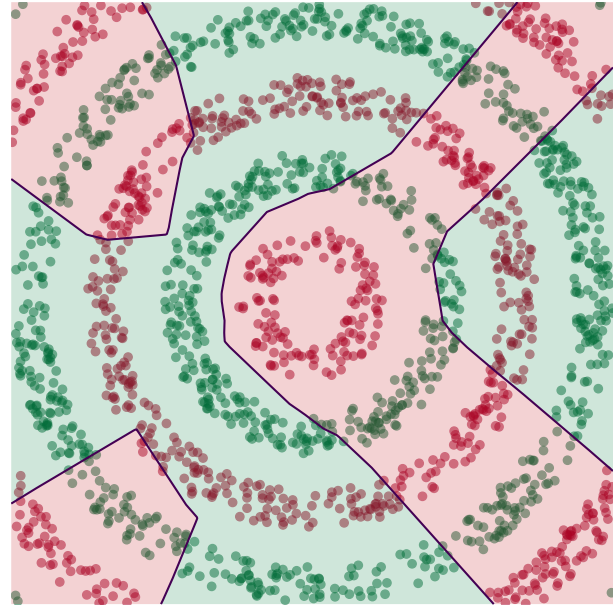



Learning a New Representation

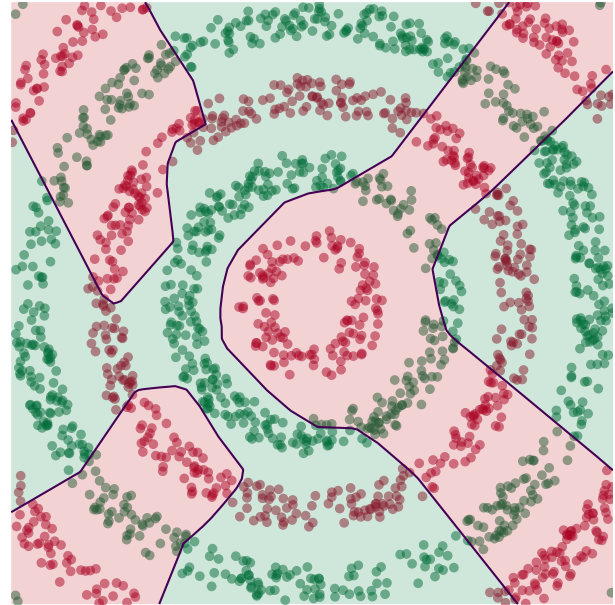



Learning a New Representation

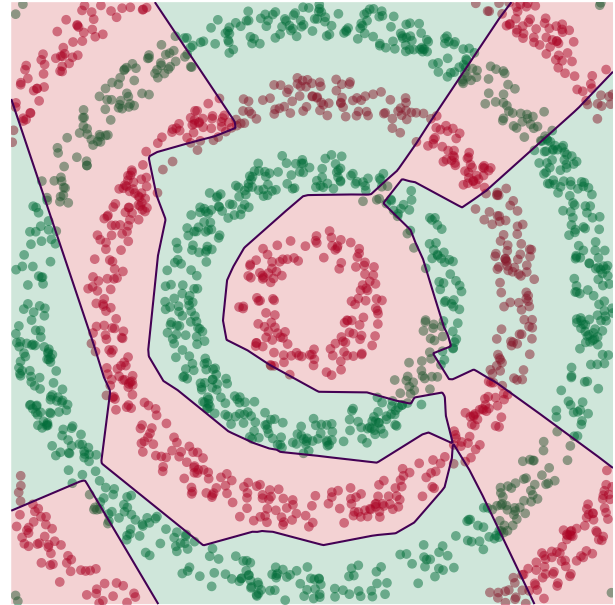



Learning a New Representation

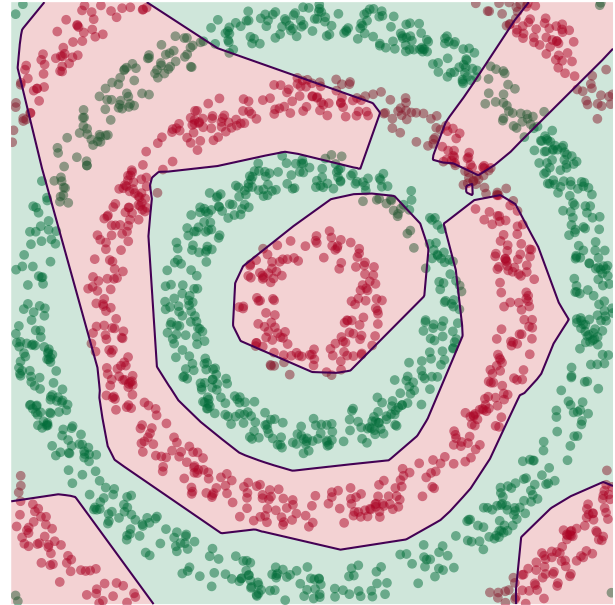



Learning a New Representation

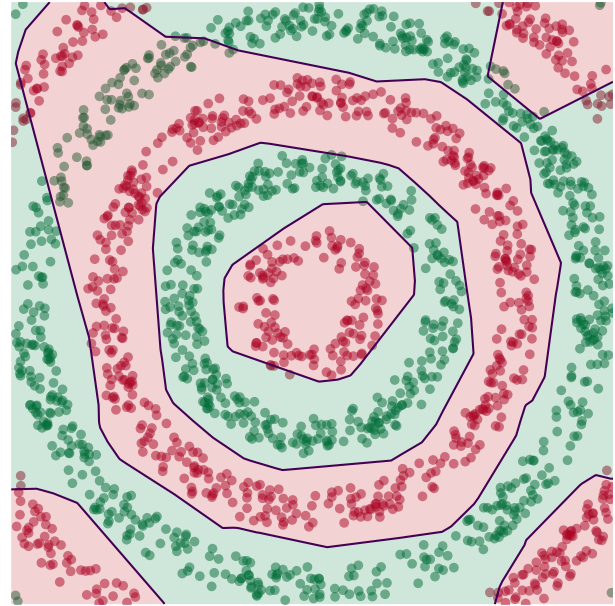



Learning a New Representation

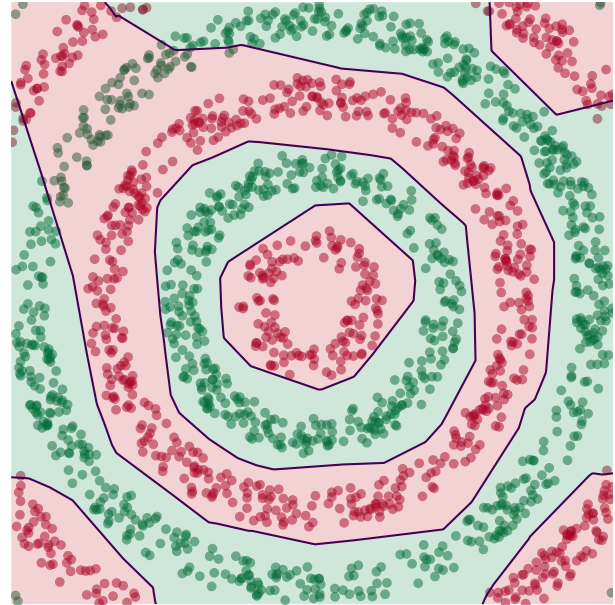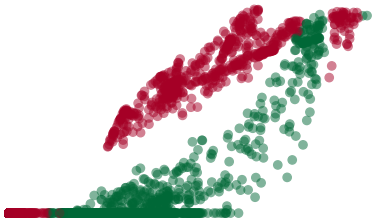



Learning a New Representation

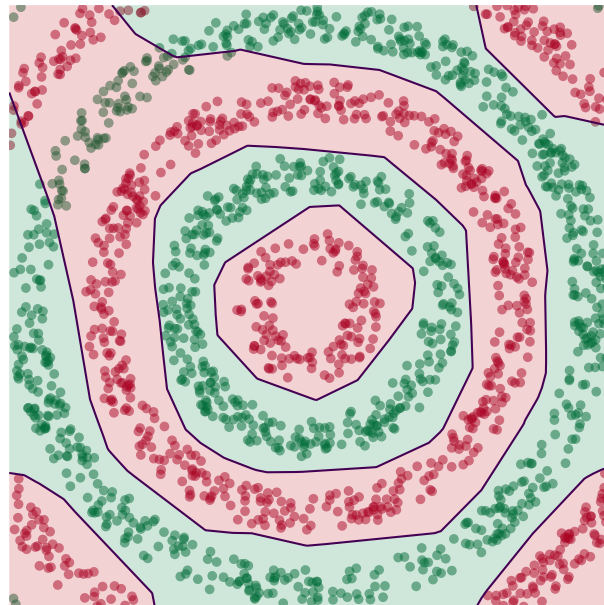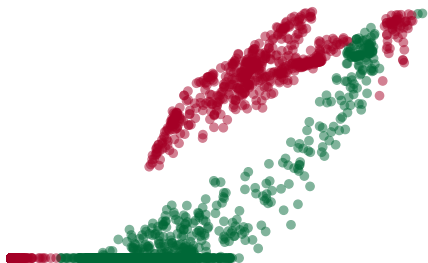



Learning a New Representation

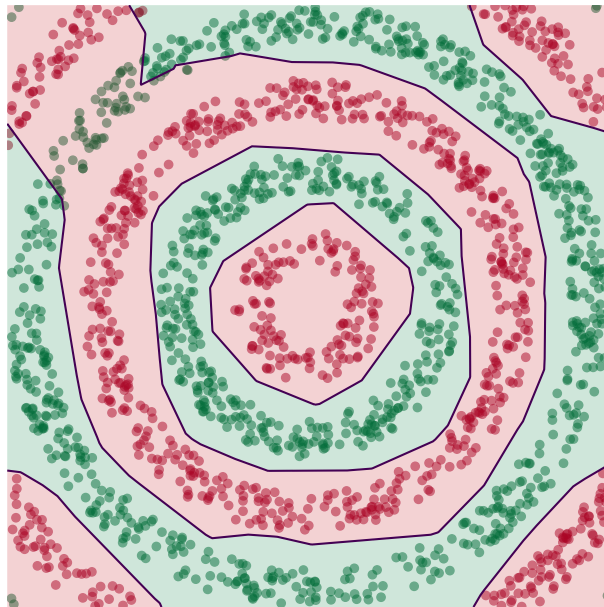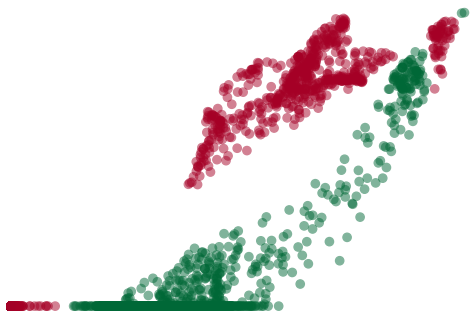



Learning a New Representation

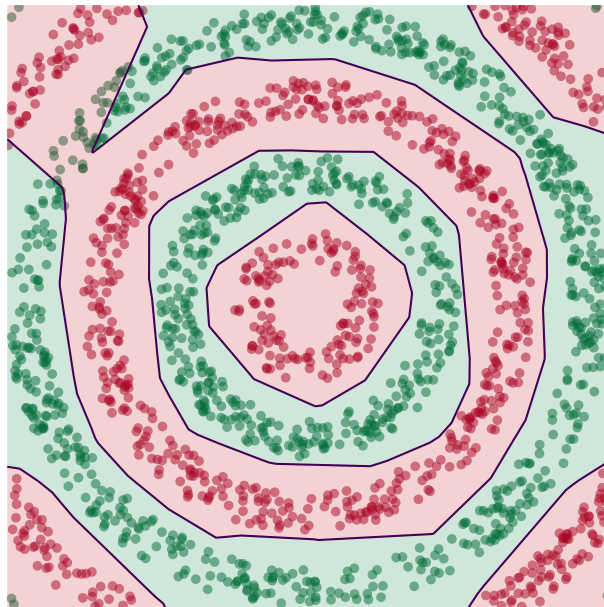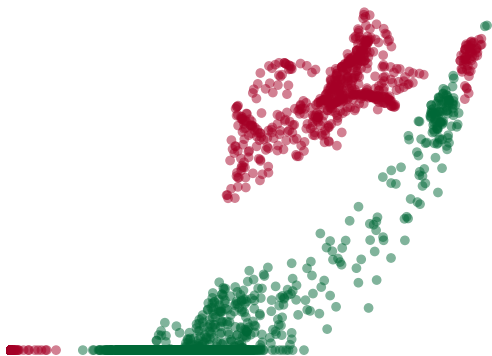



Learning a New Representation

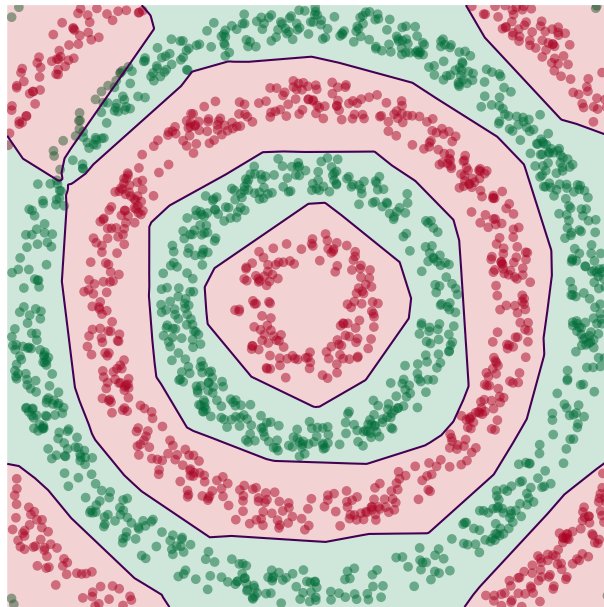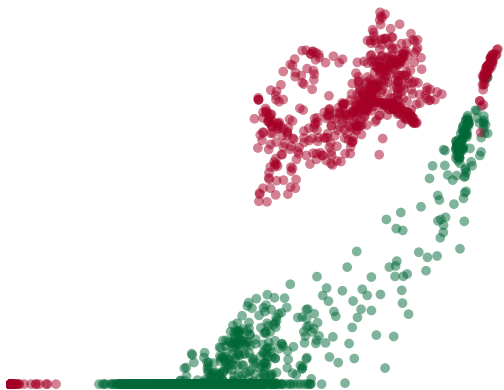



Learning a New Representation

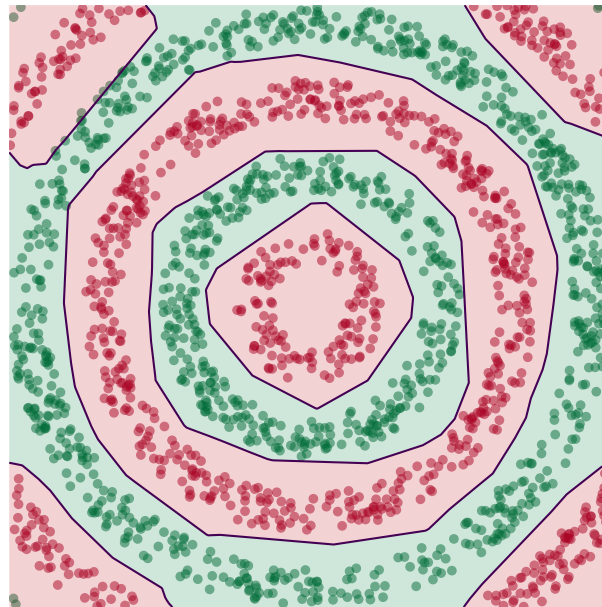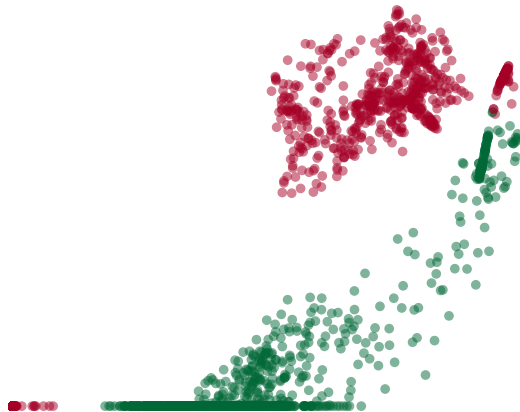



Learning a New Representation

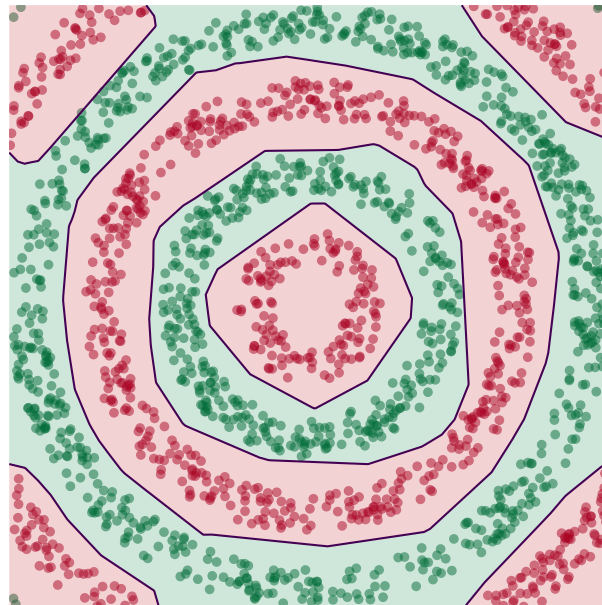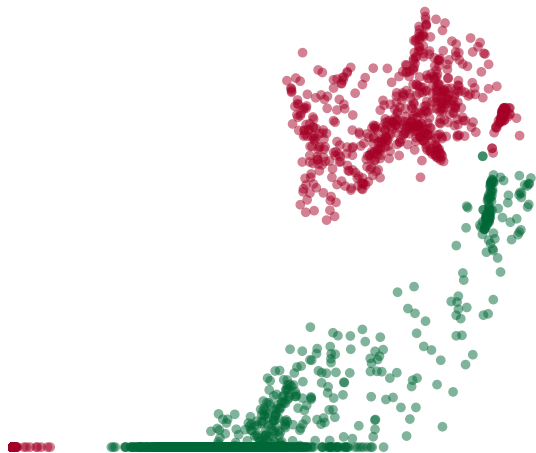



Learning a New Representation

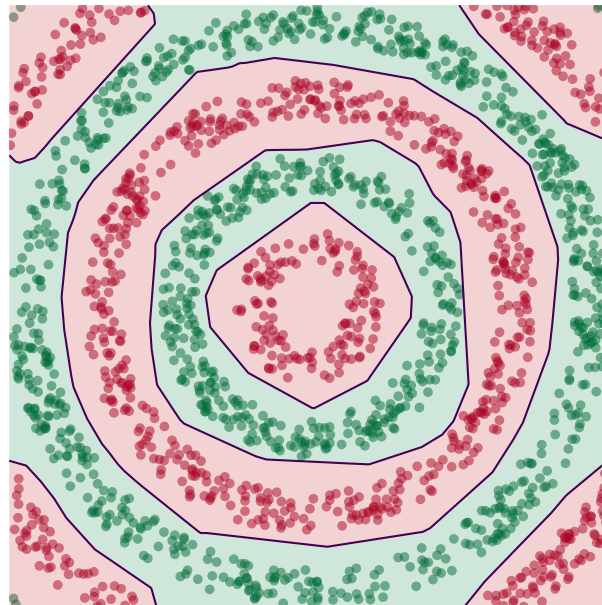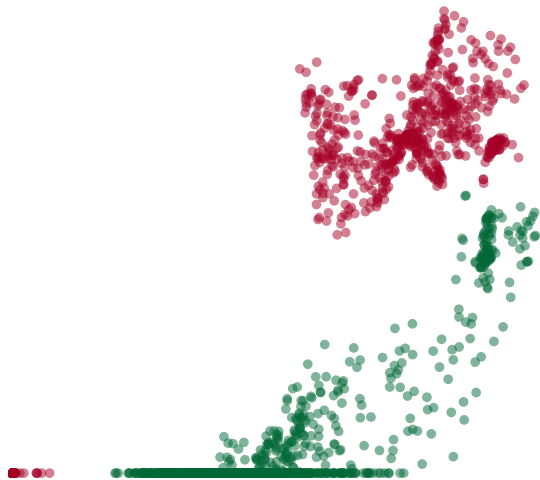


Learning a New Representation

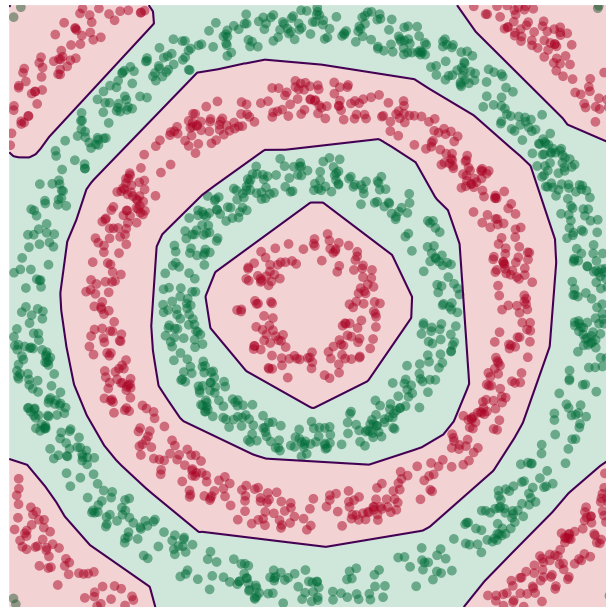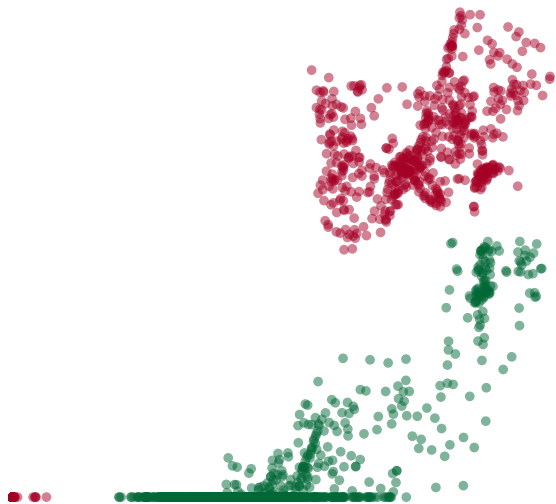



Learning a New Representation

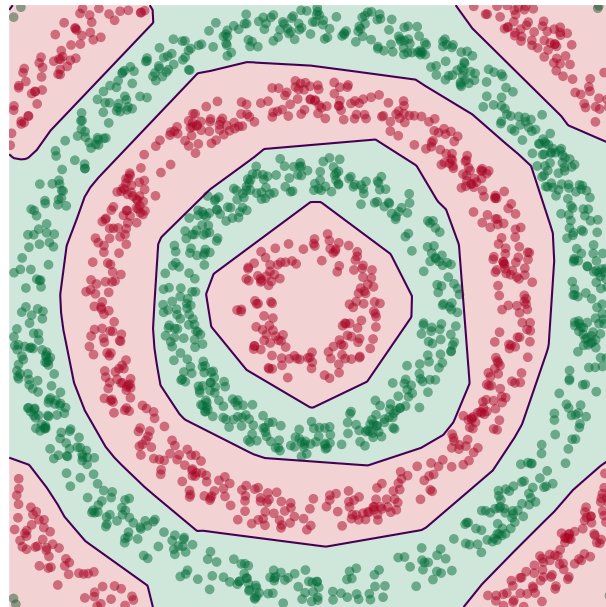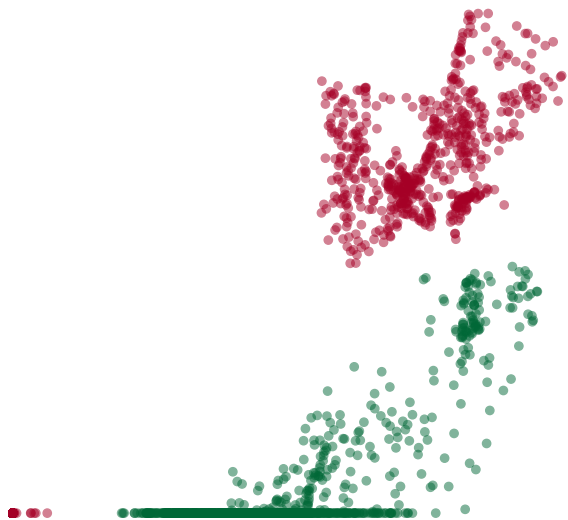



Learning a New Representation

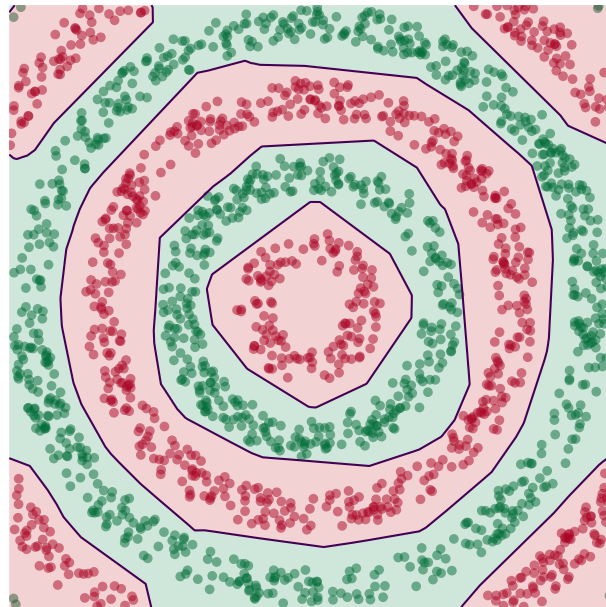


Learning a New Representation

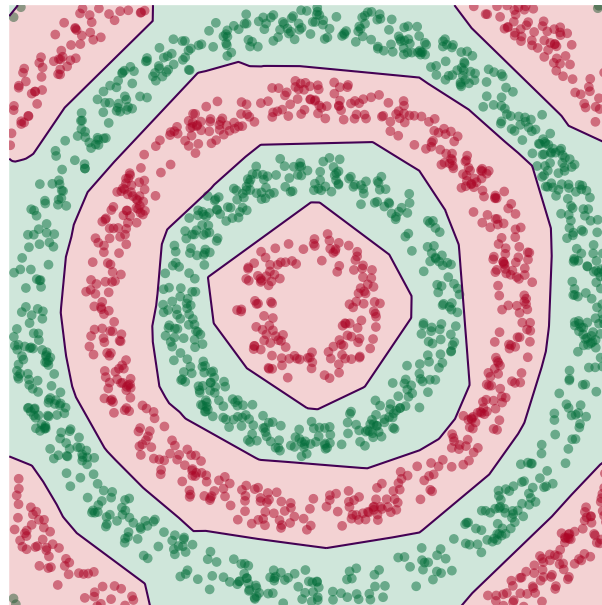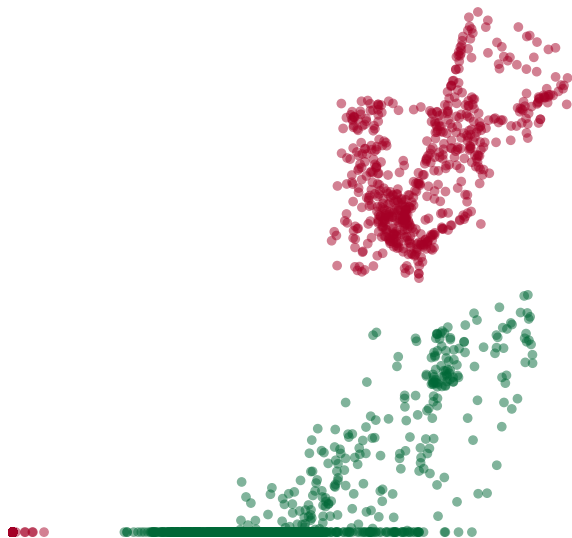



Learning a New Representation

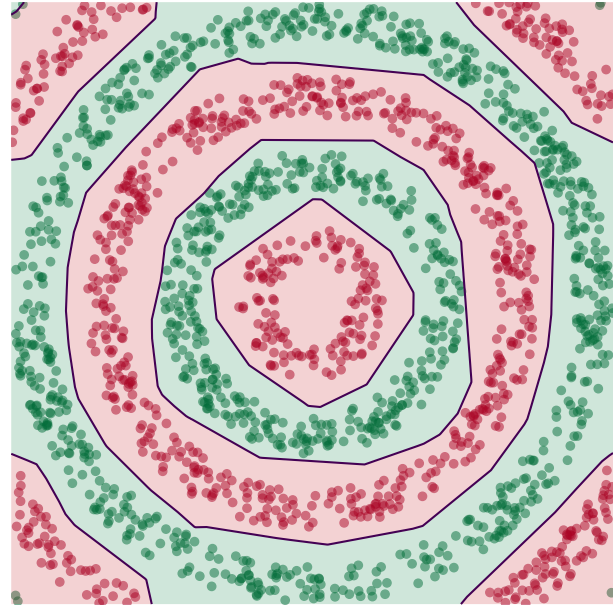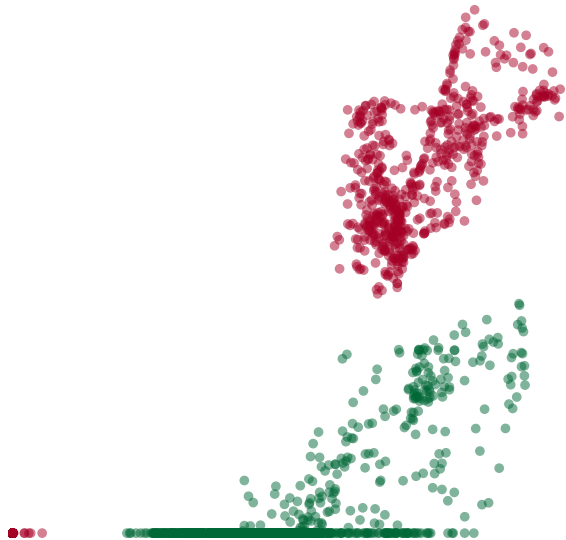


Learning a New Representation

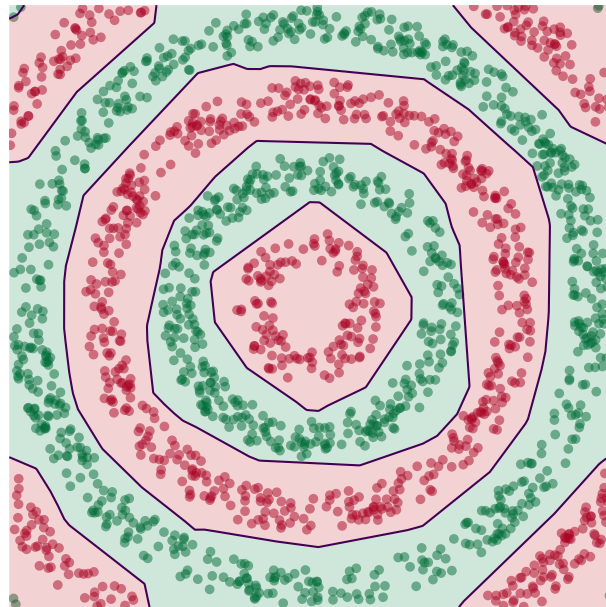



Learning a New Representation

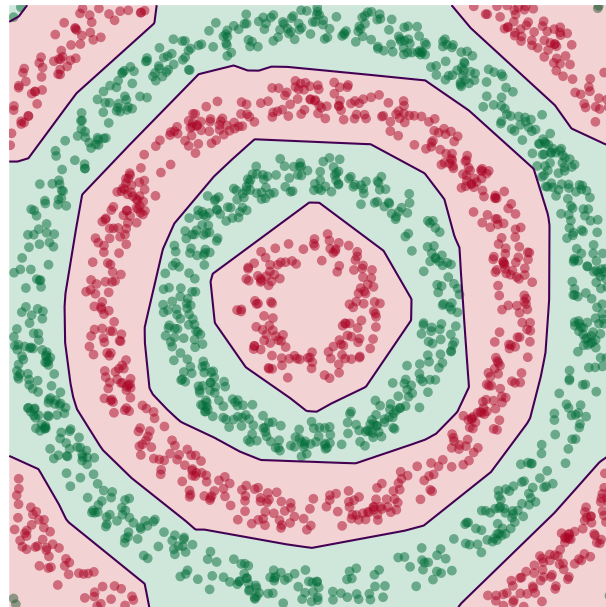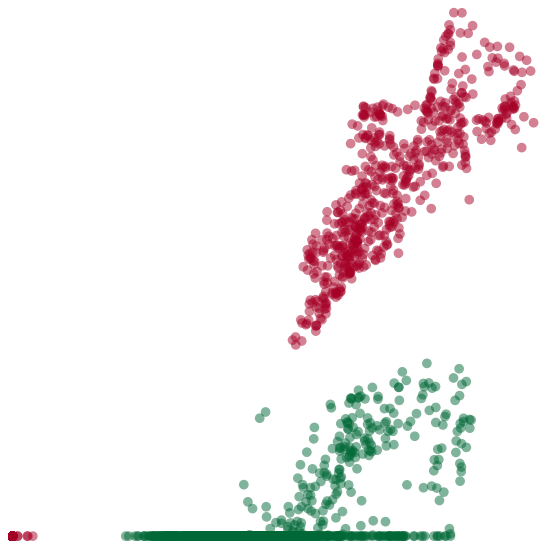


Learning a New Representation

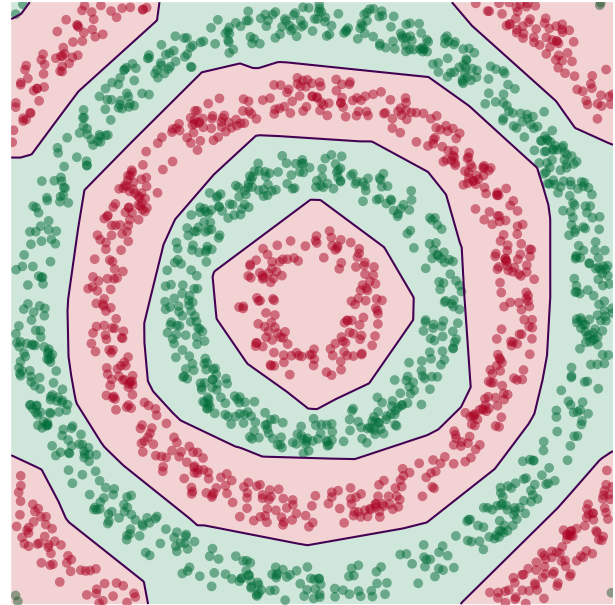


Learning a New Representation

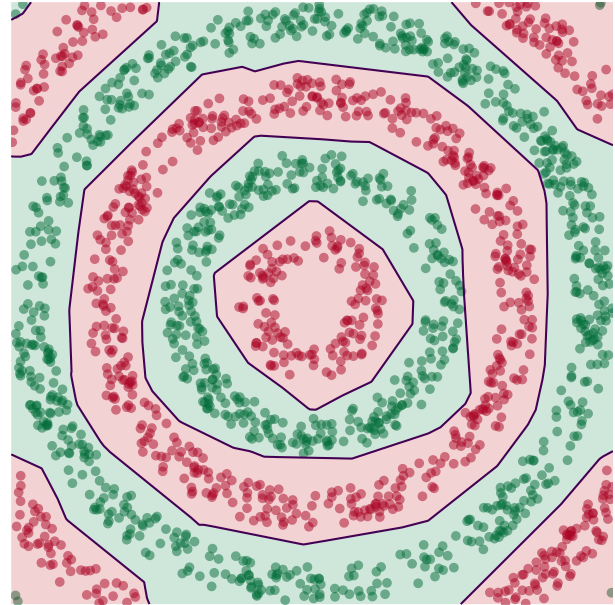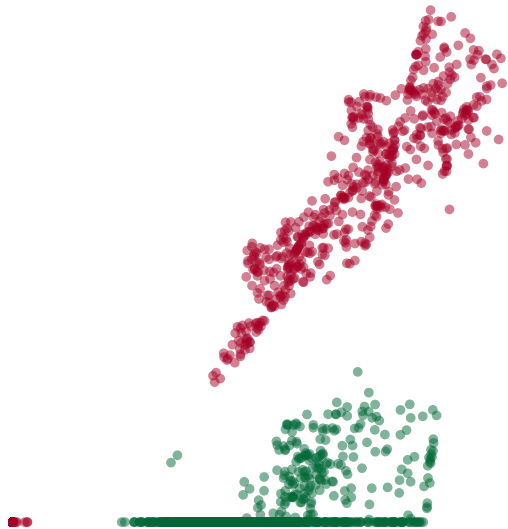



Learning a New Representation

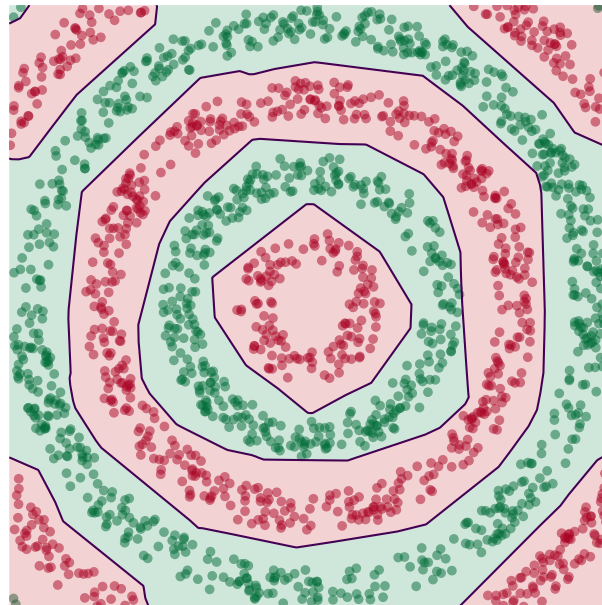



Learning a New Representation

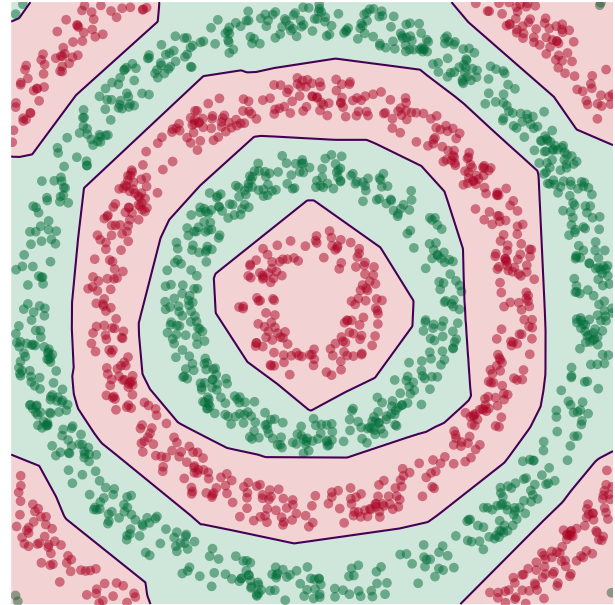



Learning a New Representation

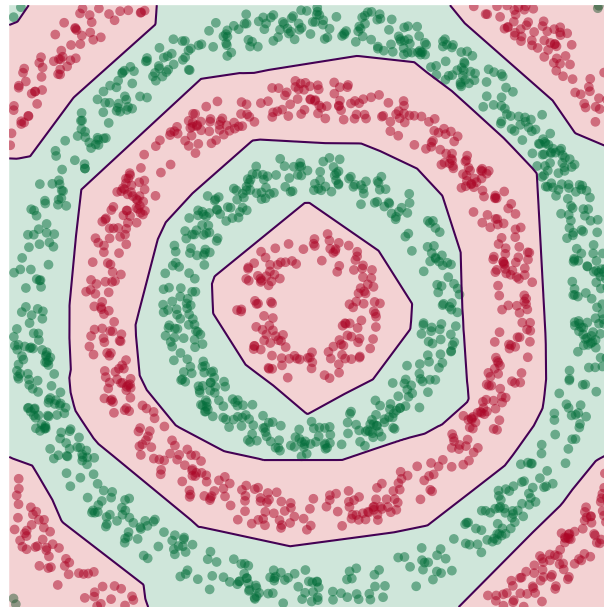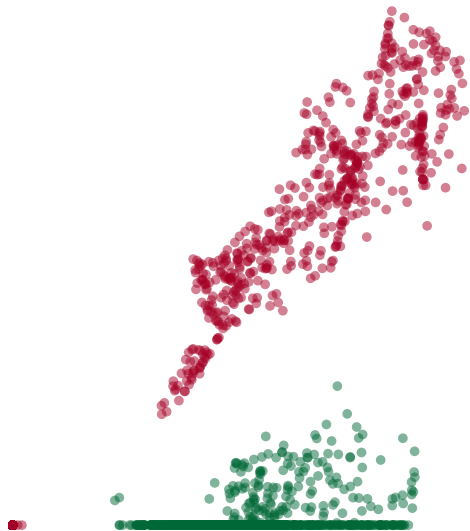



Learning a New Representation

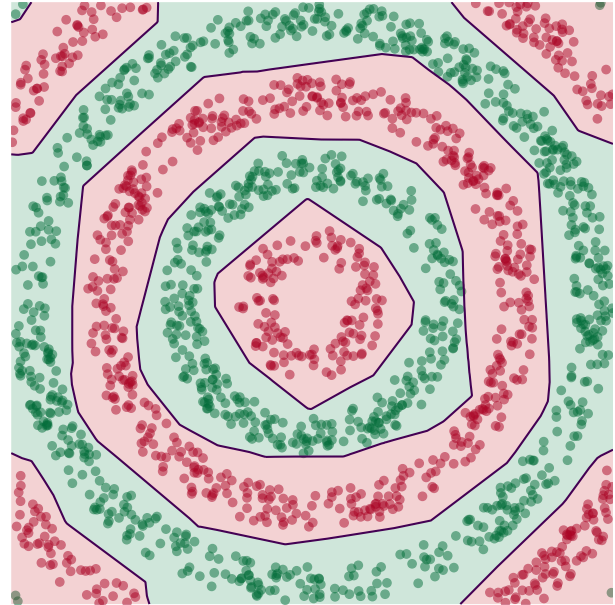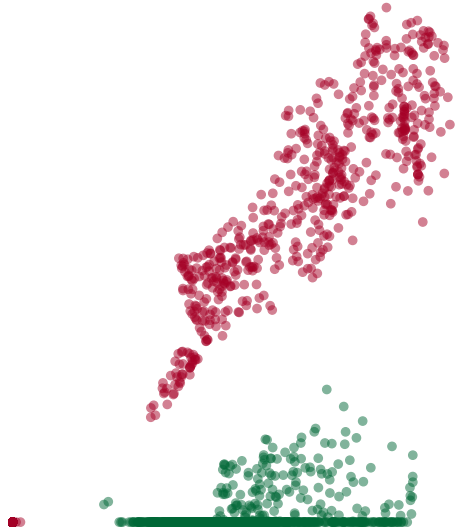

Learning a New Representation

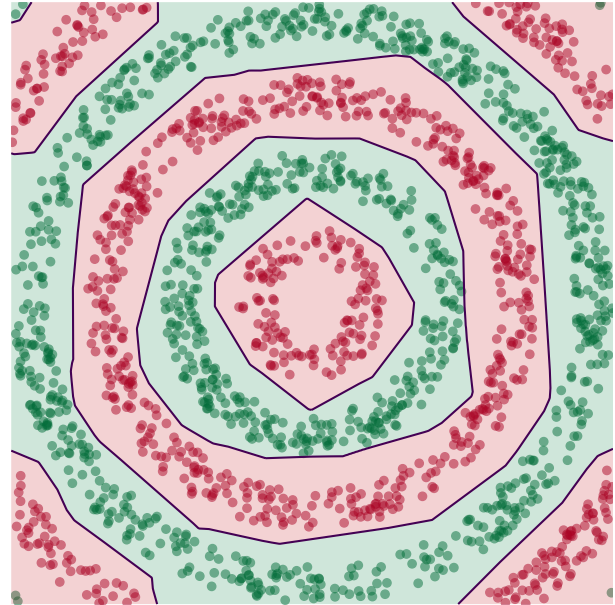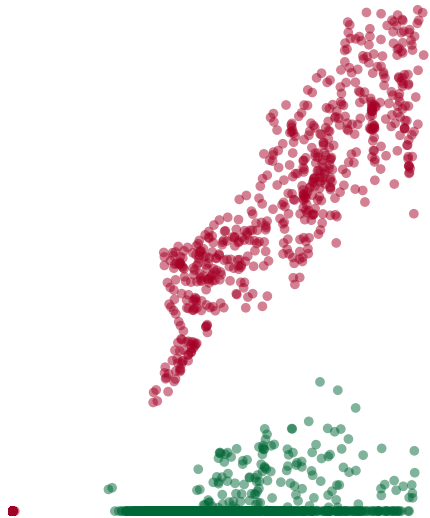

Learning a New Representation

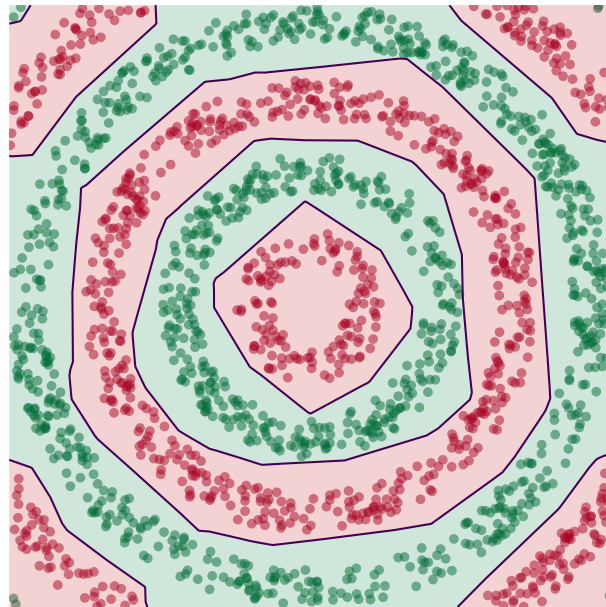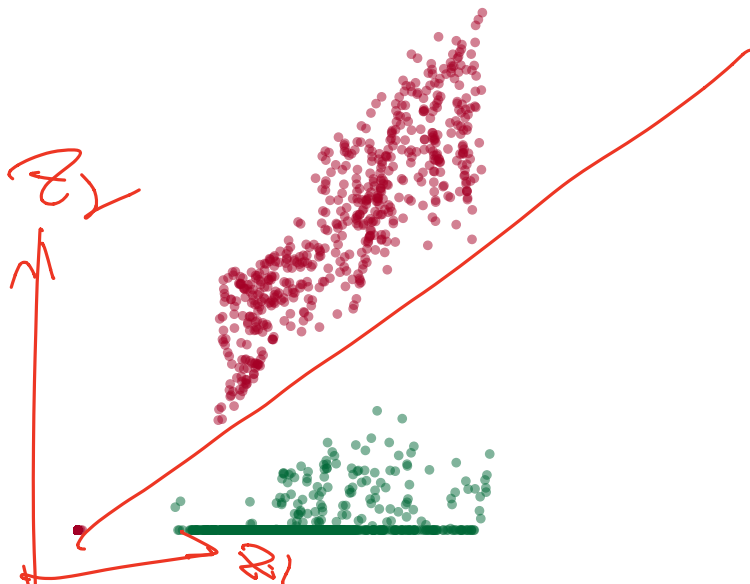

Deep Learning

- ▶ The NN has learned a new **representation** in which the data is easily classified.